

LIGHTING UP THE LIFE...

Smart
LED
RANGE



Greesh

LIGHTING UP THE LIFE...



Greesh

LIGHTING UP THE LIFE...

COMPANY INTRODUCTION

Greesh is registered brand through which we deliver medium and higher range products in domestic market.


After 2 years of endeavors, the group has undergone continuous development and expansion for providing better lighting for the customers. Our group owes its success to reliable quality, reasonable price & excellent marketing skills which made us in possession of many stable clients.

We as a manufacturing company specialization in lighting & lighting fixture products has constantly looked forward in cutting edge products and advanced technologies in the market and has made efforts to provide customers with added value through its business activities in good faith.

Taking best solutions as our starting point, we are constantly involved in the development of daring and positive business activities.

It is our aim to continue to provide our customers with the very best in cutting-edge solutions. We will continue to grow as a top-class specialized-technology manufacturing company that provides top class products incorporating the most innovative technology expertise and information with excellent coordination skills and global-support systems.



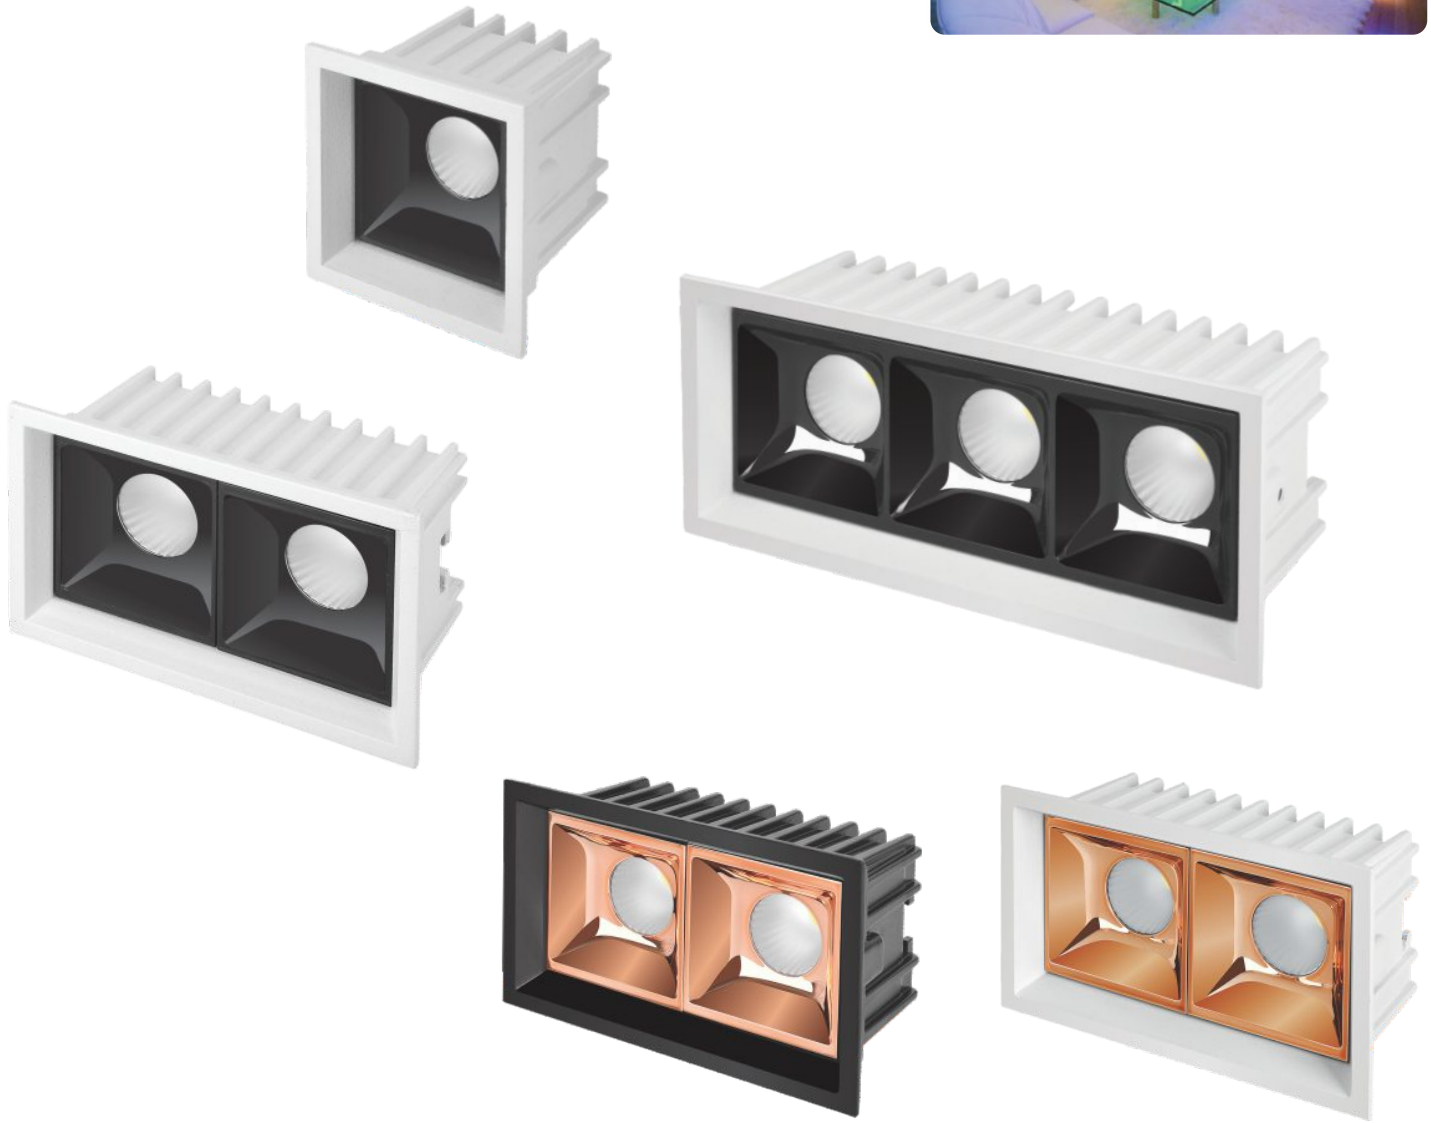

LINEA 50 SPOT LIGHT

| MODEL | MODULE | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|----------|--------|------|----------|----------|--------|------------|
| ALLN5008 | 1 | 8 | 70 x 70 | 60 x 60 | 60 | 45° |
| ALLN5016 | 2 | 16 | 120 x 70 | 110 x 60 | 60 | 45° |
| ALLN5020 | 3 | 20 | 162 x 70 | 152 x 60 | 60 | 45° |
| ALLN5006 | 1 | 6 | 70 x 70 | 60 x 60 | 60 | 45° |
| ALLN5012 | 2 | 12 | 120 x 70 | 110 x 60 | 60 | 45° |
| ALLN5018 | 3 | 18 | 162 x 70 | 152 x 60 | 60 | 45° |

CREE COB USED IN 8, 16 WATT & 20 WATT

ALUMINIUM DIE-CAST MATERIAL

INDOOR RECESSED LIGHTING

BRANDED LED USED CRI>80;140LM/W

BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING

BEAM ANGLE 45° AVAILABLE

USED FOR ANTIGLARE LIGHTING

CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE


COLOR AVAILABLE : WH/WW/NWH

PROTECTION RATING: IP20

FINISH AVAILABLE : PKW & BK

Control Type :



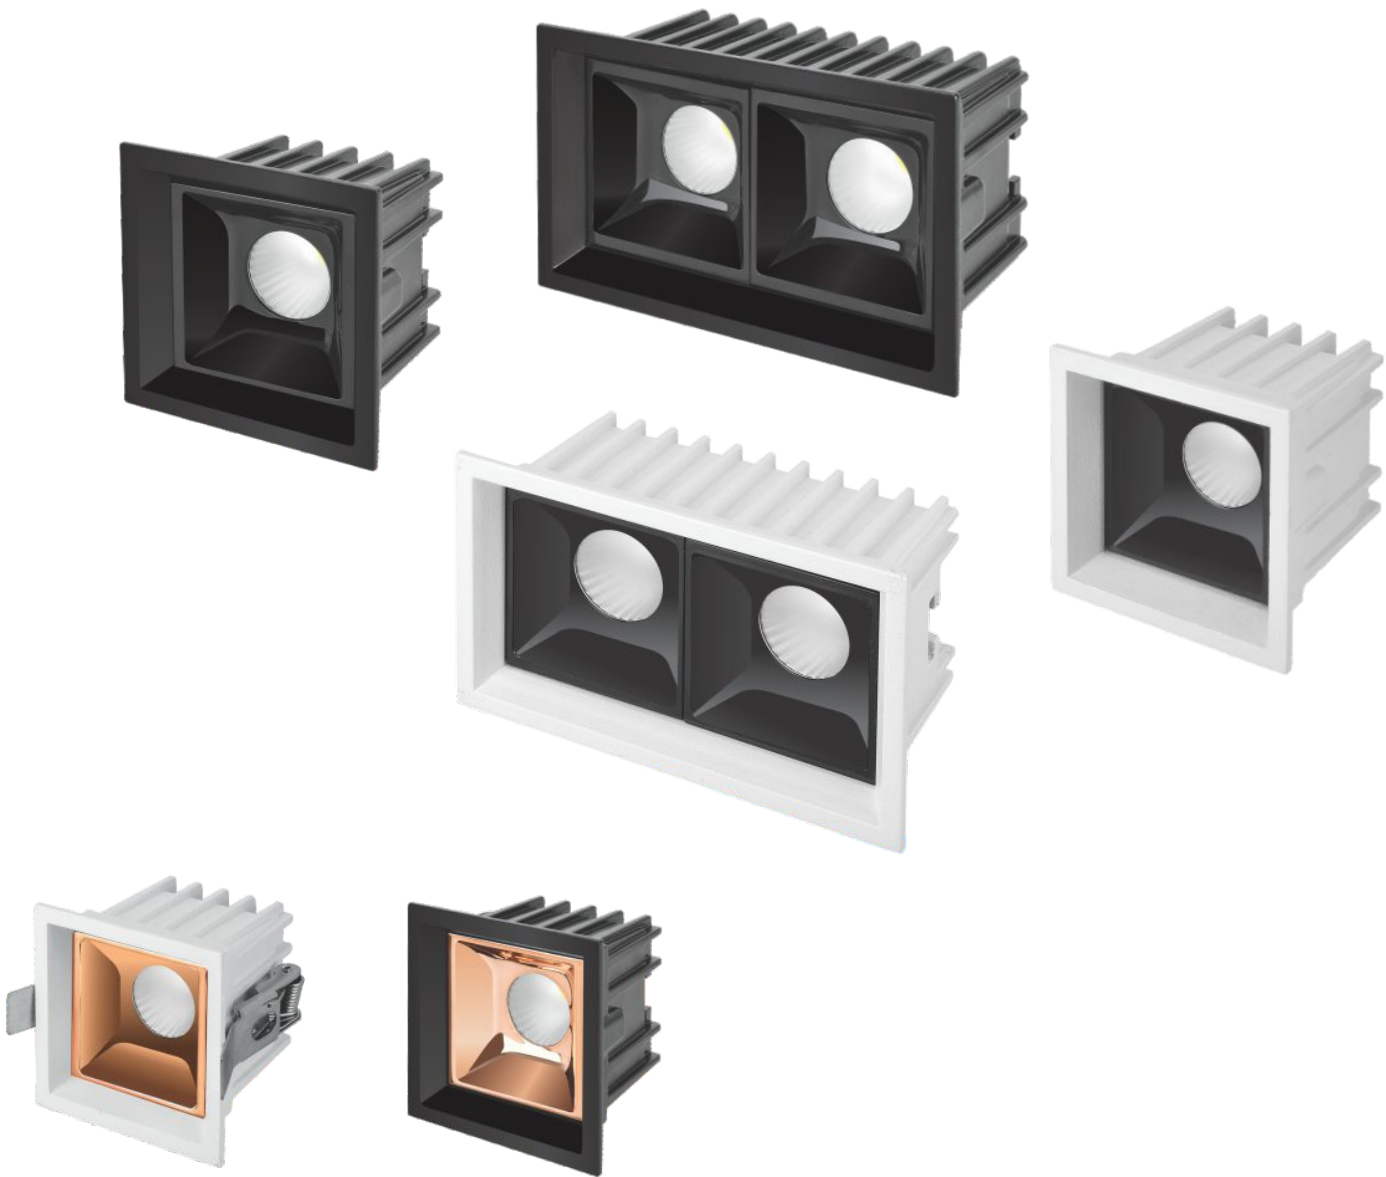

LINEA 70 SPOT LIGHT


| MODEL | MODULE | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|----------|--------|------|----------|----------|--------|------------|
| ALLN7015 | 1 | 15 | 90 x 90 | 80 x 80 | 75 | 45° |
| ALLN7030 | 2 | 30 | 160 x 90 | 150 x 80 | 75 | 45° |
| ALLN7012 | 1 | 12 | 90 x 90 | 80 x 80 | 75 | 45° |
| ALLN7024 | 2 | 24 | 160 x 90 | 150 x 80 | 75 | 45° |

CREE COB USED IN 15 WATT & 30 WATT

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 45° AVAILABLE
 USED FOR ANTIGLARE LIGHTING
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW & BK

Control Type :



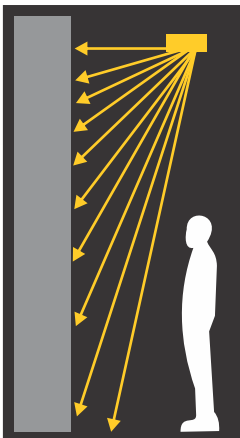


LED LINEA WALL WASHER


| MODEL | WATT | OUTER | CUT OUT | HEIGHT |
|----------|------|----------|----------|--------|
| ALLNWW12 | 12 | 146 x 44 | 137 x 35 | 40 |
| ALLNWW20 | 20 | 281 x 44 | 271 x 35 | 40 |

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 USED AS WALL WASHER LIGHTING
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW & BK

Control Type :

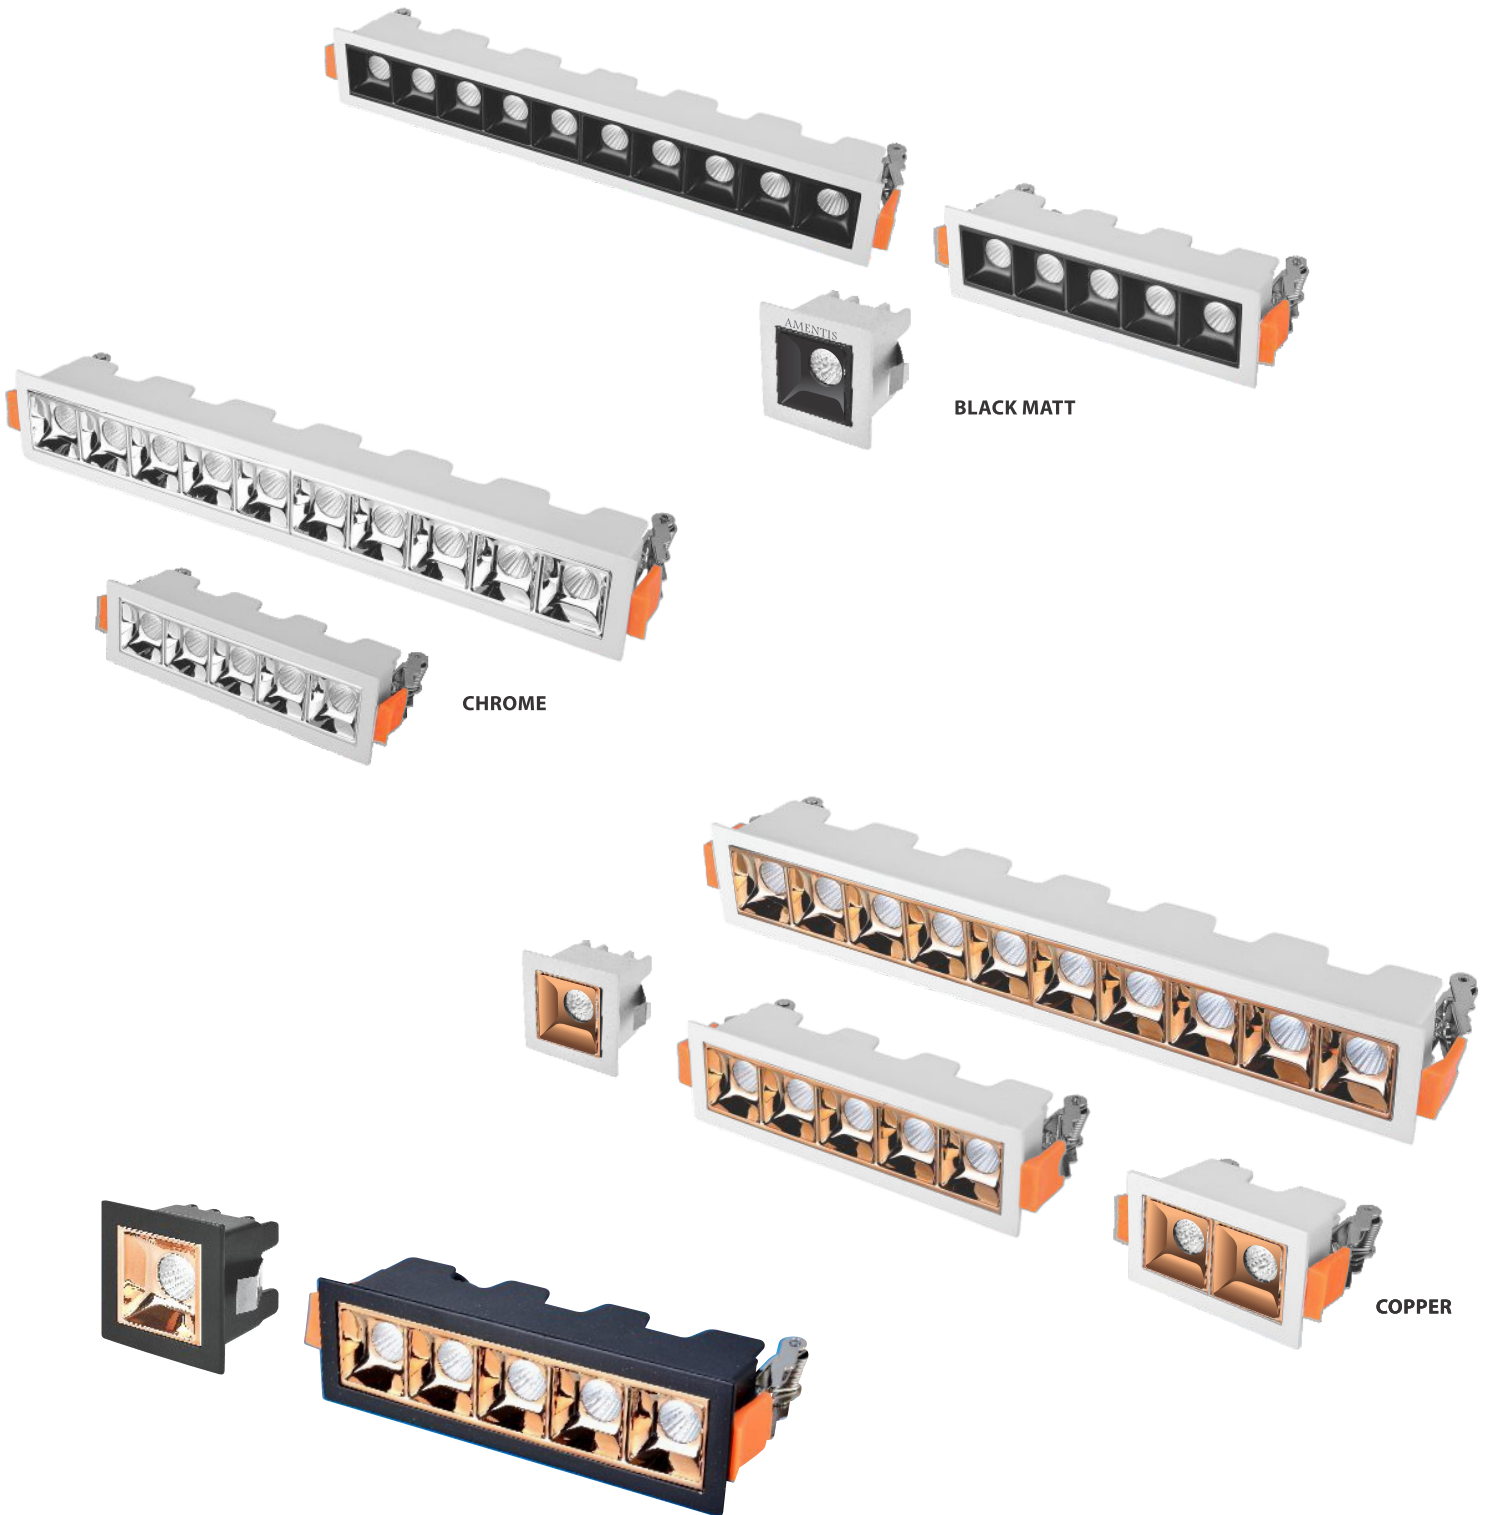

LINEA 30 SPOT LIGHT

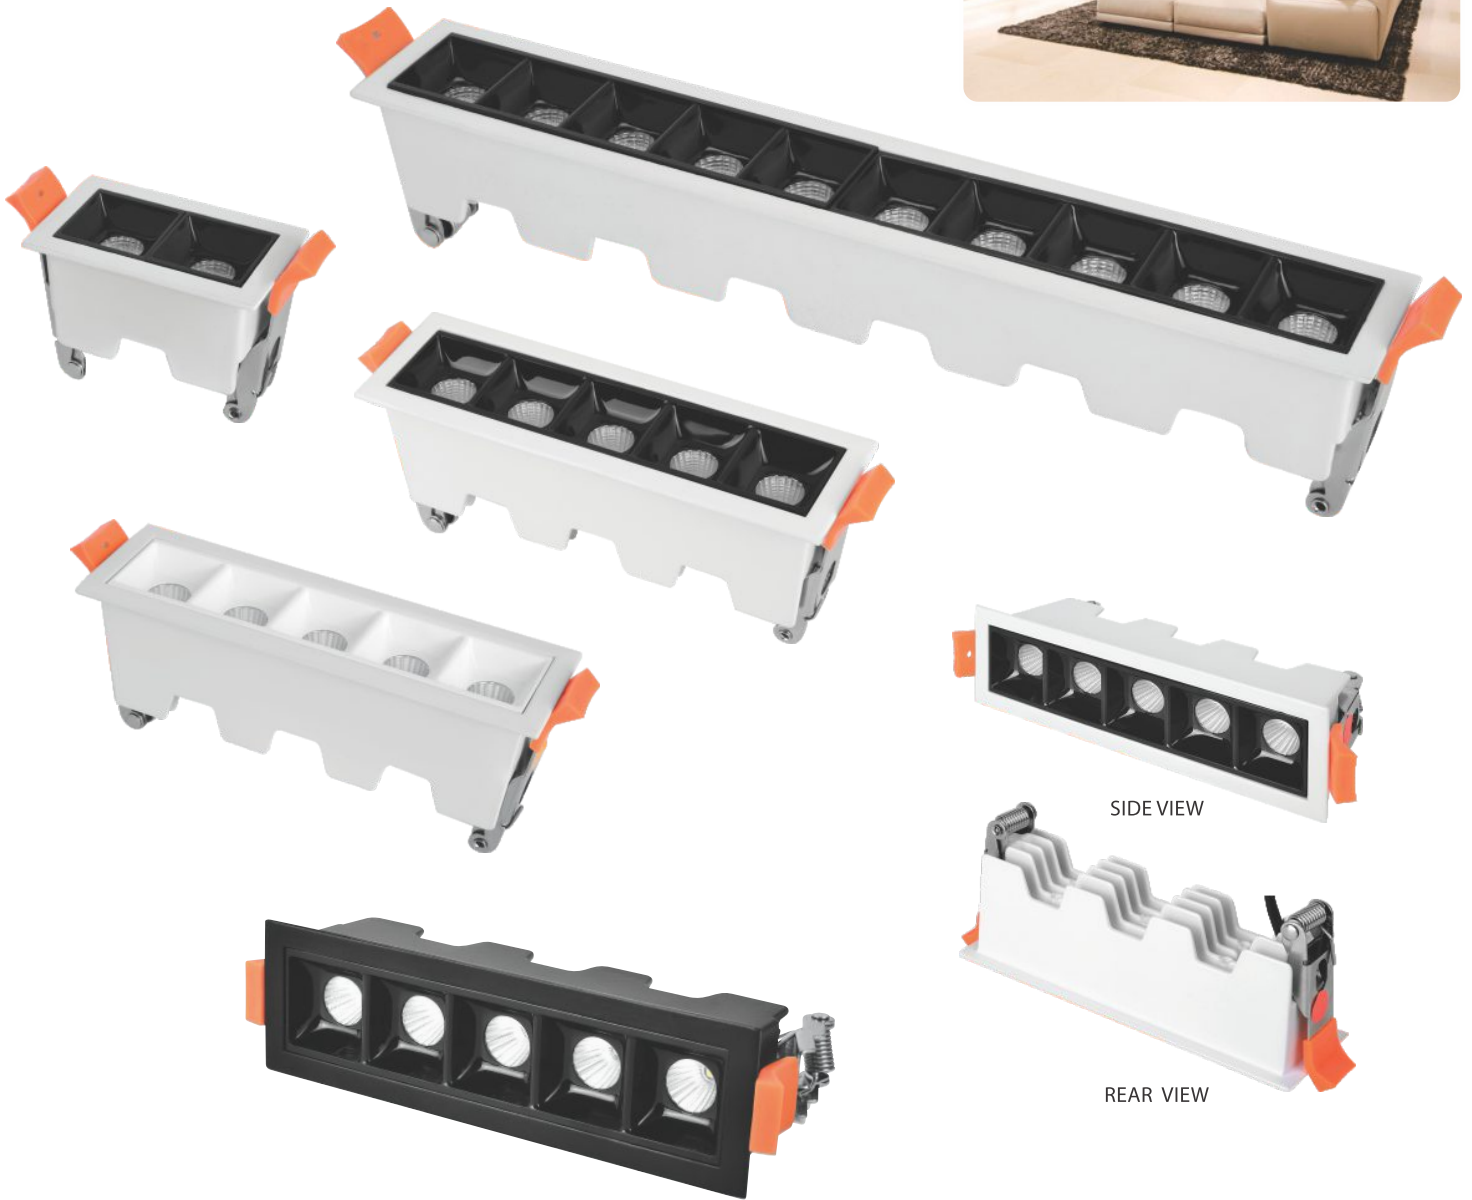

SIDE VIEW

REAR VIEW

LINEA 30 SPOT LIGHT

| MODEL | MODULE | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|---------|--------|------|----------|----------|--------|------------|
| ALLN3S | 1 | 3 | 44 x 44 | 34 x 34 | 40 | 30° |
| ALLN5S | 2 | 5 | 74 x 44 | 65 x 35 | 40 | 30° |
| ALLN12S | 5 | 12 | 146 x 44 | 137 x 35 | 40 | 30° |
| ALLN24S | 10 | 24 | 281 x 44 | 271 x 35 | 40 | 30° |
| ALLN30S | 15 | 30 | 415 x 44 | 400 x 34 | 40 | 30° |


ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 REFLECTORS AVAILABLE:
 GLOSSY BLACK/ MATT BLACK/WHITE/COPPER/CHROME
 BEAM ANGLE 30° AVAILABLE
 USED FOR ANTIGLARE LIGHTING
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 COLOR AVAILABLE : WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW & BK

Control Type :





TOP VIEW


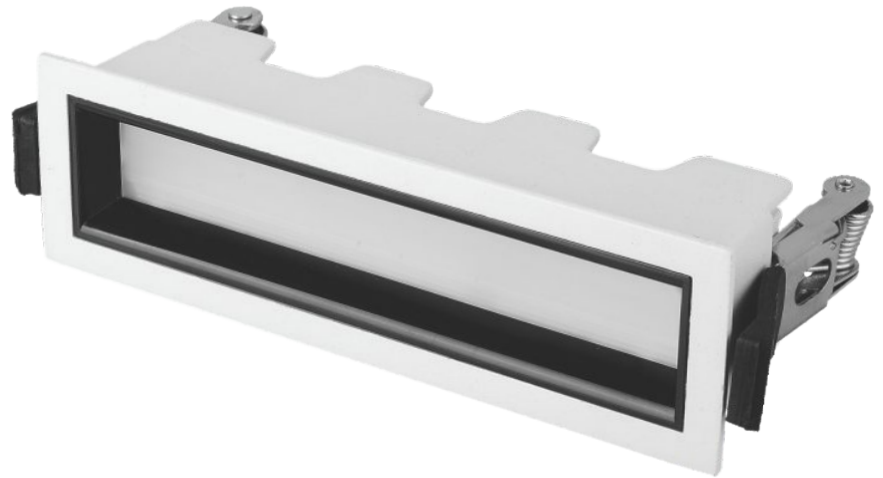


ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 80° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW & BK

LINEA DIFFUSED X

| MODEL | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|----------|------|----------|----------|--------|------------|
| ALLN12DX | 12 | 146 x 44 | 137 x 35 | 40 | 80° |
| ALLN20DX | 20 | 281 x 44 | 271 x 35 | 40 | 80° |

Control Type :

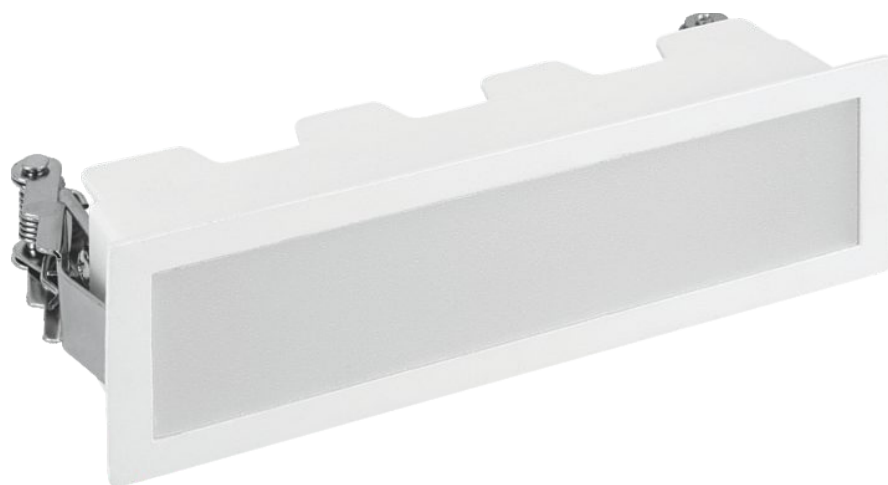


LINEA DIFFUSED

| MODEL | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|-----------|------|----------|----------|--------|------------|
| ALLN12DIF | 12 | 146 x 44 | 137 x 35 | 40 | 80° |
| ALLN20DIF | 20 | 281 x 44 | 271 x 35 | 40 | 80° |

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BEAM ANGLE 80°
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW & BK

Control Type :





REAR VIEW



GOLDEN REFLECTOR



CHROME REFLECTOR



COPPER REFLECTOR

COMPACT SIZE ANTIGLARE DOWNLIGHT
 LOW HEIGHT COB DOWNLIGHT
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 45°
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 REFLECTORS AVAILABLE: COPPER/CHROME/GOLD
 CONSTANT CURRENT DRIVER
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW & BK

Control Type :



OREO COB SPOTLIGHT

| MODEL | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|----------|------|-------|---------|--------|------------|
| ALORE10R | 10 | 80 | 70 | 45 | 45° |
| ALORE15R | 15 | 100 | 85 | 55 | 45° |



ORO COB SPOTLIGHT

| MODEL | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|----------|------|-------|---------|--------|------------|
| ALORO10R | 10 | 80 | 70 | 45 | 45° |
| ALORO15R | 15 | 100 | 85 | 55 | 45° |
| ALORO20R | 20 | 110 | 100 | 55 | 45° |



TOP VIEW



REAR VIEW

COMPACT SIZE ANTIGLARE DOWNLIGHT
 LOW HEIGHT COB DOWNLIGHT
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 45°
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 ALUMINIUM DIE-CAST MATERIAL
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW & BK

Control Type :





TOP VIEW



REAR VIEW



LOW HEIGHT COB DOWNLIGHT
 USED FOR HIGHLIGHTING PARTICULAR WALL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 ALUMINIUM DIE-CAST MATERIAL
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW

COB WALL WASHER F40

| MODEL | WATT | OUTER | CUT OUT | HEIGHT |
|----------|------|-------|---------|--------|
| ALF4012R | 12 | 84 | 69 | 78 |
| ALF4020R | 20 | 107 | 88 | 85 |

Control Type :



REAR VIEW

MAGIC LED SPOTLIGHT

| MODEL | MODULE | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|---------|--------|------|-----------|-----------|--------|------------|
| ALMG3S | 1 | 3 | 51 x 51 | 41 x 41 | 55 | 38° |
| ALMG12S | 3 | 12 | 128 x 50 | 118 x 42 | 55 | 38° |
| ALMG16S | 4 | 16 | 90 x 90 | 80 x 80 | 55 | 38° |
| ALMG20S | 5 | 20 | 205 x 50 | 195 x 42 | 55 | 38° |
| ALMG36S | 9 | 36 | 130 x 130 | 120 x 120 | 53 | 38° |

POWERED BY : OSRAM / CREE

COMPACT SIZE ANTIGLARE DOWNLIGHT
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 ALUMINIUM DIE-CAST MATERIAL
 COLOR AVAILABLE : WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW & BK

Control Type :





CHROME



GOLD



MATT SILVER



CHAMPAGNE



NICKEL



COPPER



TOP VIEW



REAR VIEW

COOL COB SPOT LIGHT

| MODEL | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|---------|------|-------|---------|--------|------------|
| ALCL7R | 7 | 64 | 60 | 59 | 25° |
| ALCL12R | 12 | 81 | 76 | 70 | 38° |
| ALCL15R | 15 | 81 | 76 | 85 | 38° |

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 38° AVAILABLE
 USED FOR FOCUSED LIGHTING
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW & BK

Control Type :





REAR VIEW

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 38° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 USED FOR FOCUSED LIGHTING
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW & BK

Control Type :


GUSH COB SPOT LIGHT

| MODEL | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|---------|------|-------|---------|--------|------------|
| ALGU3R | 3 | 50 | 32 | 24 | 15° |
| ALGU72R | 7 | 68 | 60 | 60 | 25° |
| ALGU12R | 12 | 85 | 75 | 65 | 38° |
| ALGU15R | 15 | 85 | 75 | 80 | 38° |
| ALGU18R | 18 | 95 | 83 | 81 | 38° |
| ALGU24R | 24 | 110 | 110 | 96 | 45° |



SOLIS COB SPOTLIGHT

| MODEL | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|---------|------|-------|---------|--------|------------|
| ALSO7R | 7 | 68 | 56 | 60 | 25° |
| ALSO10R | 10 | 76 | 68 | 60 | 38° |
| ALSO16R | 15 | 76 | 68 | 75 | 38° |



REAR VIEW

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 38° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 USED FOR FOCUSED LIGHTING
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW & BK

Control Type :




REAR VIEW


ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 38° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 USED FOR FOCUSSED LIGHTING
 CONSTANT CURRENT DRIVER
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW

Control Type :



DEEP FLAVA COB SPOT LIGHT

| MODEL | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|----------|------|-------|---------|--------|------------|
| ALDFL12R | 12 | 90 | 80 | 95 | 38° |

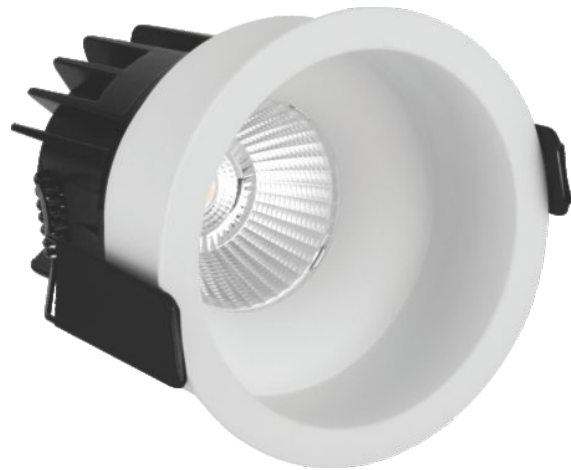

DEEP COB SPOTLIGHT


| MODEL | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|---------|------|-------|---------|--------|------------|
| ALDE7R | 7 | 71 | 62 | 70 | 25° |
| ALDE12R | 12 | 82 | 75 | 85 | 38° |
| ALDE16R | 16 | 82 | 75 | 100 | 38° |



REAR VIEW

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 38° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 USED FOR FOCUSSED LIGHTING
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW & BK

Control Type :






TRIMLESS FLAVA COB SPOTLIGHT

| MODEL | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|----------|------|-------|---------|--------|------------|
| ALTFL12R | 12 | 73 | 66 | 73 | 38° |




TOP VIEW



REAR VIEW



TOP VIEW

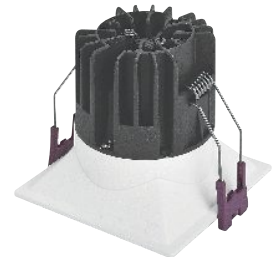

REAR VIEW

FLAVA COB SPOTLIGHT - ROUND

| MODEL | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|---------|------|-------|---------|--------|------------|
| ALFL3R | 3 | 38 | 28 | 27 | 15° |
| ALFL7R | 7 | 68 | 60 | 62 | 25° |
| ALFL12R | 12 | 85 | 75 | 73 | 38° |
| ALFL15R | 15 | 85 | 75 | 88 | 38° |
| ALFL18R | 18 | 95 | 81 | 92 | 38° |
| ALFL24R | 24 | 120 | 110 | 96 | 45° |

FLAVA COB SPOTLIGHT - SQUARE

| | | | | | |
|---------|----|----|----|----|-----|
| ALFL7S | 7 | 68 | 60 | 62 | 25° |
| ALFL12S | 12 | 85 | 75 | 73 | 38° |
| ALFL15S | 15 | 85 | 75 | 88 | 38° |

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 38° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 USED FOR FOCUSED LIGHTING
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW, BK & COPPER

Control Type :





TOP VIEW



TOP COB SPOT LIGHT

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 45° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 USED FOR FOCUSED LIGHTING
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW

Control Type :



| MODEL | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|---------|------|-------|---------|--------|------------|
| ALTP9R | 9 | 75 | 68 | 96 | 45° |
| ALTP15R | 15 | 90 | 80 | 115 | 45° |
| ALTP20R | 20 | 128 | 113 | 120 | 45° |



REAR VIEW

I-BALL COB SPOT LIGHT

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 USED FOR FOCUSED LIGHTING
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW

Control Type :



| MODEL | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|---------|------|-------|---------|--------|------------|
| ALIB10R | 10 | 65 | 52 | 86 | 25° |
| ALIB15R | 15 | 84 | 71 | 95 | 38° |
| ALIB20R | 20 | 100 | 85 | 120 | 45° |



REAR VIEW

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 38° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 USED FOR FOCUSED LIGHTING
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW

Control Type :



SONA COB SPOT LIGHT

| MODEL | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|----------|------|-------|---------|--------|------------|
| ALSON12R | 12 | 106 | 97 | 90 | 38° |



RIO COB SPOTLIGHT


| MODEL | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|---------|------|-------|---------|--------|------------|
| ALRI12R | 12 | 85 | 75 | 52 | 38° |



REAR VIEW

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 38° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 USED FOR FOCUSED LIGHTING
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW

Control Type :





TOP VIEW



REAR VIEW

360° ROTATABLE

- FIXTURE CAN BE PUSHED IN AND OUT
- ALUMINIUM DIE-CAST MATERIAL
- INDOOR RECESSED LIGHTING
- BRANDED LED USED CRI>80;140LM/W
- BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
- CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
- USED FOR FOCUSED LIGHTING
- COLOR AVAILABLE : WH/WW/NWH
- PROTECTION RATING: IP20
- FINISH AVAILABLE : PKW

Control Type :



IN OUT PIPE COB SPOT LIGHT

| MODEL | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|---------|------|-------|---------|--------|------------|
| ALIO7R | 7 | 70 | 60 | 108 | 25° |
| ALIO12R | 12 | 100 | 90 | 120 | 38° |



EVON SMALL PIPE

| MODEL | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|---------|------|-------|---------|--------|------------|
| ALEV12R | 12 | 90 | 80 | 95 | 24° |

10" LONG PIPE

| | | | | | |
|---------|---|----|----|--------|-----|
| ALEVL7R | 7 | 92 | 83 | 43+180 | 24° |
|---------|---|----|----|--------|-----|



REAR VIEW

360° ROTATABLE

- ALUMINIUM DIE-CAST MATERIAL
- INDOOR RECESSED LIGHTING
- BRANDED LED USED CRI>80;140LM/W
- BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
- CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
- USED FOR FOCUSED LIGHTING
- COLOR AVAILABLE : WH/WW/NWH
- PROTECTION RATING: IP20
- FINISH AVAILABLE : PKW+BK : BK+GOLD

Control Type :





TOP VIEW



360° ROTATABLE

- ALUMINIUM DIE-CAST MATERIAL
- INDOOR RECESSED LIGHTING
- BRANDED LED USED CRI>80;140LM/W
- BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
- BEAM ANGLE 38° AVAILABLE
- CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
- USED FOR FOCUSED LIGHTING
- COLOR AVAILABLE : WH/WW/NWH
- PROTECTION RATING: IP20
- FINISH AVAILABLE : PKW+BK

Control Type :



NEW PIPE

| MODEL | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|---------|---------|-------|---------|--------|------------|
| ALPI12R | 12 WATT | 72 | 60 | 105 | 38° |



3° BEAM COB SPOT LIGHT

| MODEL | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|--------|------|-------|---------|--------|------------|
| ALBE3R | 3 | 60 | 48 | 36 | 3° |



TOP VIEW



REAR VIEW

BEAM ANGLE 3° ONLY

- ALUMINIUM DIE-CAST MATERIAL
- INDOOR RECESSED LIGHTING
- BRANDED LED USED CRI>80;140LM/W
- BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
- CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
- USED FOR FOCUSED LIGHTING
- COLOR AVAILABLE : WW/NWH
- PROTECTION RATING: IP20
- FINISH AVAILABLE : PKW



TOP VIEW

EMPTY FIXTURES FOR MR 16 BULBS
 ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 FINISH AVAILABLE : PKW/BK
 MODELS AVAILABLE : ROUND/SQUARE



MR 16 C12

| MODEL | SHAPE | OUTER | CUT OUT | HEIGHT |
|----------|--------|-------|---------|--------|
| ALMRC12R | ROUND | 92 | 84 | 50 |
| ALMRC12S | SQUARE | 92 | 84 | 50 |



MR 16 FRONT OPEN C13

| MODEL | SHAPE | OUTER | CUT OUT | HEIGHT |
|----------|-------|-------|---------|--------|
| ALMRC13R | ROUND | 98 | 90 | 53 |




TOP VIEW

EMPTY FIXTURES FOR MR 16 BULBS
 ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 FINISH AVAILABLE : PKW
 MODELS AVAILABLE : ROUND




TOP VIEW

ALUMINIUM DIE-CAST MATERIAL
 INDOOR SURFACE LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 45° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : BK

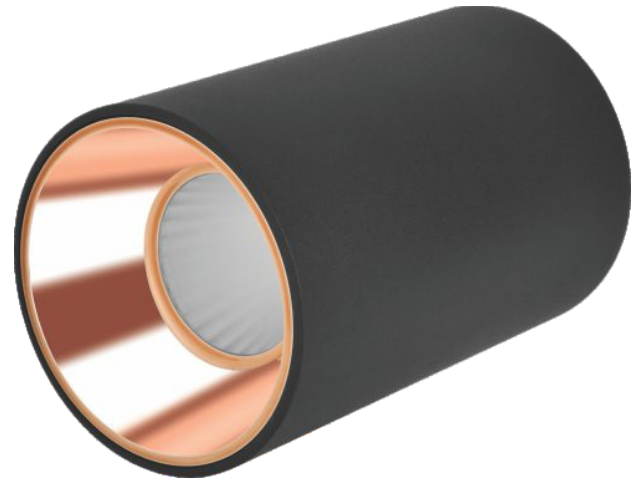

OREO RD COB SURFACE

| MODEL | WATT | OUTER | HEIGHT | BEAM ANGLE |
|---------|---------|-------|--------|------------|
| ALOZ12R | 12 WATT | 75 | 150 | 45° |
| ALOZ20R | 20 WATT | 96 | 150 | 45° |

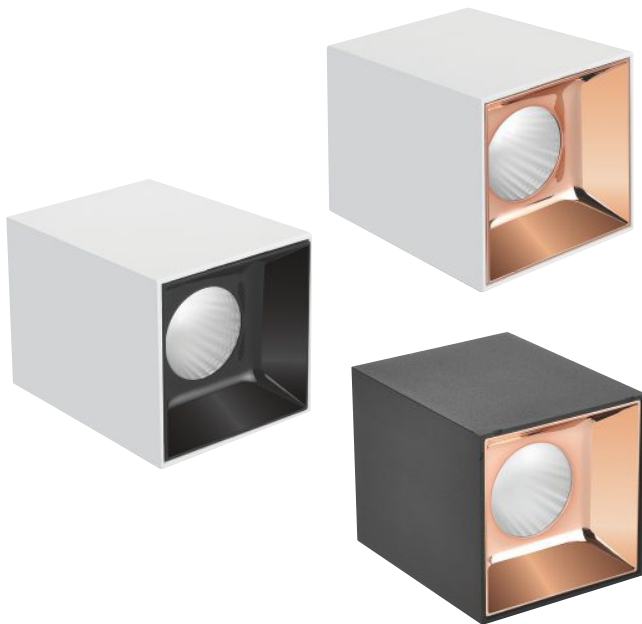

OREO SQ COB SURFACE

| MODEL | WATT | OUTER | HEIGHT | BEAM ANGLE |
|---------|------|-------|--------|------------|
| ALOS12S | 12 | 74 | 95 | 45° |



TOP VIEW

ALUMINIUM DIE-CAST MATERIAL
 INDOOR SURFACE LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 45° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW / BK



TOP VIEW

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 38° AVAILABLE
 USED FOR FOCUSSED LIGHTING
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW

Control Type :



LEAK CONCIL

| MODEL | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|-------|---------|-------|---------|--------|------------|
| L438 | 15 WATT | 98 | 88 | 24+47 | 38° |



TOP VIEW

ALUMINIUM DIE-CAST MATERIAL
 INDOOR SURFACE LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 38° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW



LEAK SURFACE

| MODEL | WATT | OUTER | HEIGHT | BEAM ANGLE |
|-------|------|-------|--------|------------|
| L140 | 15 | 100 | 102 | 38° |




TOP VIEW

ALUMINIUM DIE-CAST MATERIAL
 INDOOR SURFACE LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 25° AVAILABLE
 CONSTANT CURRENT DRIVER
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW-BK / BK-GD

L SURFACE

| MODEL | WATT | OUTER | HEIGHT | BEAM ANGLE |
|-------|------|-------|--------|------------|
| L 107 | 9 | 50 | 162 | 25° |

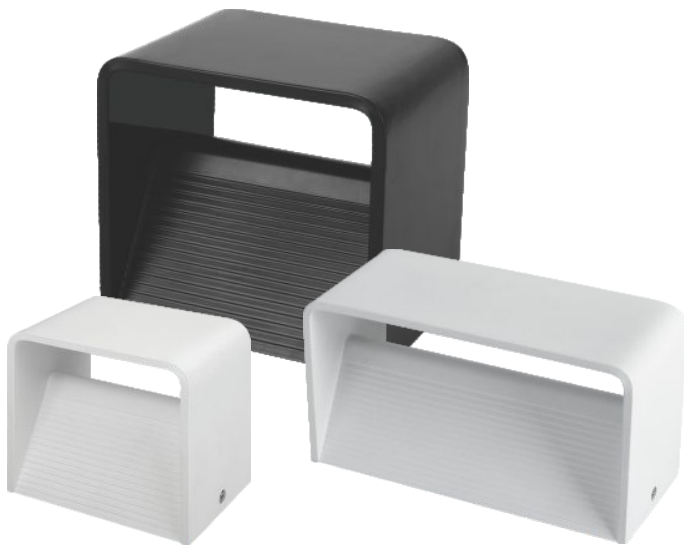

REAR VIEW



REAR VIEW

ALUMINIUM MATERIAL USED
 STEP DIMMABLE ALSO AVAILABLE
 USED AS AESTHETIC LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW & BK

BOX WALL LIGHT

| MODEL | WATT | LENGTH | WIDTH | HEIGHT |
|--------|------|--------|-------|--------|
| ALBX6 | 6 | 110 | 80 | 100 |
| ALBX12 | 12 | 190 | 80 | 100 |
| ALBX24 | 24 | 310 | 80 | 100 |
| ALBX30 | 30 | 460 | 80 | 100 |



REAR VIEW



TOP VIEW

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 80° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW
 3CCT TUNABLE AND DIMMABLE ALSO AVAILABLE

AMOR SMD DOWNLIGHT LED

| MODEL | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|---------|------|-------|---------|--------|------------|
| ALAM12R | 12 | 150 | 135 | 55 | 80° |
| ALAM18R | 18 | 150 | 135 | 55 | 80° |
| ALAM24R | 24 | 200 | 185 | 55 | 80° |
| ALAM30R | 30 | 200 | 185 | 55 | 80° |

Control Type :



REAR VIEW



AMOR COB DOWNLIGHT

| MODEL | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|---------|------|-------|---------|--------|------------|
| ALAC18R | 18 | 150 | 135 | 55 | 80° |
| ALAC28R | 28 | 200 | 185 | 55 | 80° |

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 80° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 COLOR AVAILABLE : WH/WW/NWH
 FINISH AVAILABLE : PKW

Control Type :





REAR VIEW



TOP VIEW

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 80° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW
 3CCT TUNABLE AND DIMMABLE ALSO AVAILABLE

ORUS DOWN LIGHT - ROUND

| MODEL | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|---------|------|-------|---------|--------|------------|
| ALOR9R | 9 | 110 | 97 | 39 | 80° |
| ALOR16R | 16 | 140 | 130 | 39 | 80° |
| ALOR24R | 22 | 175 | 163 | 39 | 80° |

Control Type :



REAR VIEW



TOP VIEW



ORUS SLIM DOWN LIGHT - SQUARE

| MODEL | WATT | OUTER | CUT OUT | HEIGHT | BEAM ANGLE |
|---------|------|-------|---------|--------|------------|
| ALOR9S | 9 | 110 | 97 | 40 | 80° |
| ALOR16S | 16 | 140 | 130 | 40 | 80° |
| ALOR24S | 24 | 175 | 163 | 40 | 80° |

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 80° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW
 3CCT TUNABLE AND DIMMABLE ALSO AVAILABLE

Control Type :





FOOT LIGHT - STEP

| MODEL | WATT | LENGTH | WIDTH | HEIGHT |
|-------|------|--------|-------|--------|
| ALFL2 | 2 | 90 | 72 | 45 |
| ALFL4 | 4 | 150 | 72 | 45 |

LED OUTDOOR WALL LIGHT
ALUMINIUM DIE-CAST
USED FOR OUTDOOR APPLICATION
CONSTANT CURRENT DRIVER



2 WAY OUTDOOR

| MODEL | WATT | LENGTH | WIDTH | HEIGHT |
|-------|------|--------|-------|--------|
| 2006 | 6 | 117 | 60 | 40 |
| 2006X | 6 | 117 | 60 | 40 |

4 WAY OUTDOOR

| MODEL | WATT | LENGTH | WIDTH | HEIGHT |
|-------|------|--------|-------|--------|
| 2012 | 12 | 98 | 98 | 50 |
| 2012X | 12 | 98 | 98 | 50 |


LED OUTDOOR WALL LIGHT
ALUMINIUM DIE-CAST
USED FOR OUTDOOR APPLICATION
CONSTANT CURRENT DRIVER



TOP VIEW



REAR VIEW

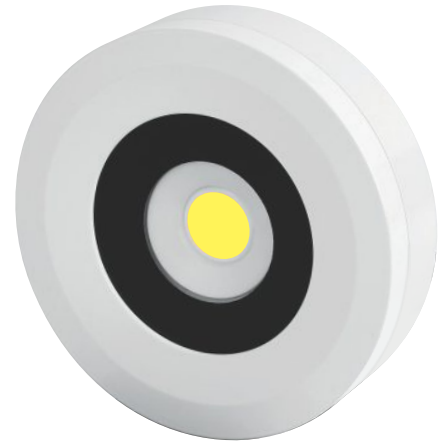

IP 65 SURFACE P30

| MODEL | WATT | OUTER | HEIGHT |
|---------|------|-------|--------|
| ALP305R | 5 | 57 | 15 |

ALUMINIUM DIE CAST
IP65 FIXTURE
SLIM HEIGHT
USED FOR OUTDOOR APPLICATION

| CURRENT | VOLTAGE | DIMMING TYPE |
|-----------------------|---------|--------------|
| 200 Ma | 8-43 V | TRIAC |
| 250 Ma | 8-43 V | TRIAC |
| 300 Ma | 8-40 V | TRIAC |
| 300 Ma | 40-65 V | TRIAC |
| 350 Ma | 8-40 V | TRIAC |
| 400 Ma | 8-40 V | TRIAC |
| 500 Ma | 8-40 V | TRIAC |
| 700 Ma | 8-26 V | TRIAC |
| 700 Ma | 26-43 V | TRIAC |
| 300 Ma | 30-60 V | 0-10V |
| 500 Ma | 12-24 V | 0-10V |
| 700 Ma | 18-36 V | 0-10V |
| 300 Ma | 2-42 V | DALI |
| 200/250 300/350 Ma | 9-42 V | DALI |
| 350/400 450/500 Ma | 9-42 V | DALI |
| 550/600 650/700 Ma | 9-42 V | DALI |

DIMMABLE DRIVER





Greesh

SMART LIGHTING
FOR SMART LIVING



LIGHTING UP THE LIFE...

Disclaimer : Product and accessories shown in this catalog may change due to continuous research and development.
Company may change or alter any model without prior notice.